

NEDERMAN 115A EX



TECHNICAL SPECIFICATION

Application	Dust, Liquid, Granulate, Swarf
Certifications	CE, EX
Filter Area (m ²)	0,35
Compressed Air Requirement	1,6 Nm ³ /min
Filter Material	Polyester-Teflon
Filter Type	Bag
Hose Diameter (mm)	51
Hose Length (m)	7,5
Max Airflow (m ³ /h)	342
Max Vacuum (kPa)	-31
Number of Filter Elements	1
Noise Level (dB(A))	74.0
Type of Hose	PE/C
Weight (kg)	51
Working Pressure (kPa)	700

DESCRIPTION

Wet/dry vacuum cleaner with a single container system for suction and transportation of various liquids like oil, chemical spillage, mud, cooling liquids, and water, as well as metal chips, sand, and other granules.

The industrial vacuum cleaner can fill the container with liquids in about a minute or two and the suction equipment is made for heavy duty work. The container can be tipped for ease of emptying. ATEX approved equipment: EX 3GD c IIC 60°C (T6).


SUPPLIED WITH

- Cleaning set

FEATURES

- Float ball prevents overfilling of liquids.
- Multi-purpose vacuum unit.
- Tippable container with ball valve.
- ATEX approved.

PERFORMANCE GRAPH

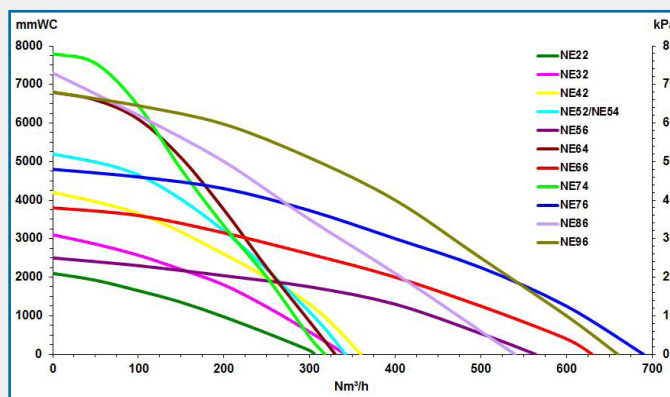

PART CODE/ORDERING TABLE

115A Ex - NE32, with float ball	42211500
---------------------------------	----------