

NEDERMAN 306A



TECHNICAL SPECIFICATION

Application	Liquid, Granulate, Swarf
Certifications	CE
Dustbin Volume (l)	40+47
Filter Area (m ²)	0,35
Installation	Outdoor, Indoor
Compressed Air Requirement	1,6 Nm ³ /min
Filter Material	PTFE on PET
Filter Type	Bag
Hose Diameter (mm)	51
Hose Length (m)	7,5
Max Airflow (m ³ /h)	342
Max Vacuum (kPa)	-31
No. of Filter Elements	1
Noise Level (dB(A))	74.0
Type of Hose	PE/C
Weight (kg)	69

DESCRIPTION

With a pre-separator container this wet/dry vacuum extractor is designed for extraction, collection and separation of liquids, sand, and other granules. The industrial vacuum cleaner 306A is air powered and is suitable for wet and dry extraction. This dry/wet vacuum contains two filtration stages that ensure optimum cleaning efficiency. Suction equipment is strong and durable, suitable for building and construction industry and turning and general industries. The wet/dry vacuum containers can be easily tilted to empty their materials. The float ball prevent the first container from overfilling. The trolley is equipped with large wheels for ease of mobility.


FEATURES

- Easy to empty with tippable container
- High mobility and great for handling industrial spillage
- Liquid recovery - wet and dry extraction

ACCESSORIES

Control Spneum for NE	43212001
Control S for NE 22-76	43220001
Control S for NE 22-76	43220026
Control S for NE 86-96	43222008

PERFORMANCE GRAPH

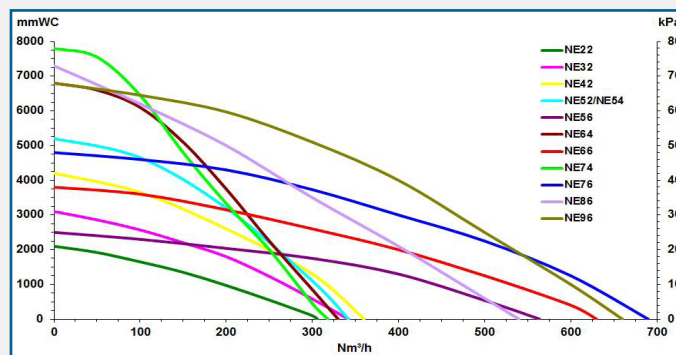

PART CODE/ORDERING TABLE

306 A without accessories NE32	42130602
--------------------------------	----------

AES OFFER INSTALLATION AND SERVICE SUPPORT FOR ALL EQUIPMENT