


SB - ROUND RUBBER NOZZLE WITH BELLOWS

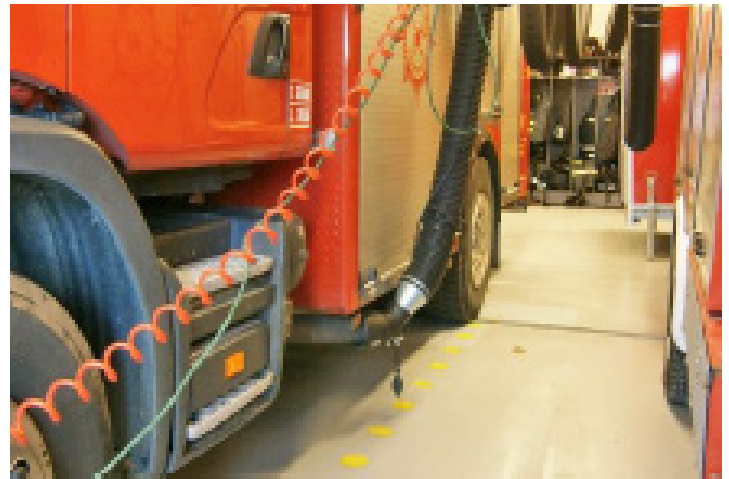

DESCRIPTION

The SB nozzle uses compressed air to attach to the exhaust pipe, this can be achieved by using the inflatable air bellows and a hand pump, or by connecting to a compressed air supply.

The connection can be made from a compressed air system at 1 bar.

Available in Ø100 & Ø150 mm hose connection.

The SB is available for both small and large vehicles and is available in kevlar for use at high temperatures. It is ideal for use where the vehicle needs to be disconnected automatically.

OPERATION

The SB can be connected to the exhaust pipe in two different ways. The first uses a hand pump with vent valves can be used to inflate the bellows and secure the connection.

The second connection method uses compressed air which when set to 1 bar can suitable inflate the nozzle allowing a secure connection.

The nozzle can be attached onto the exhaust directly and connected to a hose reel or channel duct system to achieve efficient and safe extraction.

AES can supply hose reels, channel ducting and other extraction options to suit the GeoFlexGrip nozzle.

TECHNICAL SPECIFICATION/AES ORDERING TABLE

Part No.	Description	Exhaust	Hose Connection	Weight	AES Part Code
06-350	SB 100/80	Ø100 mm	Ø80 mm	0.90 kg	EA-NZ08-001
06-354	SB 100/100	Ø100 mm	Ø100 mm	0.90 kg	EA-NZ08-002
06-355	SB 160/150	Ø160 mm	Ø150 mm	1.30 kg	EA-NZ08-003
06-360	SB 200/150	Ø200 mm	Ø150 mm	1.60 kg	EA-NZ08-004
06-360A	SB 250/150	Ø125 mm	Ø150 mm	2.00 kg	EA-NZ08-005

AES OFFER INSTALLATION AND SERVICE SUPPORT FOR ALL EQUIPMENT