

NEDERMAN 888/889 HOSE REEL FOOD GRADE

DESCRIPTION

Thanks to the open design, the reels are very easy to service, maintain and keep clean.

Can be installed on wall or on the ceiling.

Fitted with slightly larger drums and therefore are able to take longer hoses than Series 888.

FEATURES

- Outlet position can be adjusted through 120° for optimum pull-out and pull-in angle
- Spring power can easily be adjusted from the outside
- Ratchet easily disengaged when required

TECHNICAL SPECIFICATION

Product Name	Hose Reel 888/889
Connection hose length (m)	1
Corrosion resistance	(Standard)
Electric/Spring driven	(Spring)



HOSE SPECIFICATION

Type of hose	Media	Delivered with hose	Colour	Distribution hose length (m)	Diameter, connection hose (mm)	Distribution hose diameter (mm)	Max working pressure (Mpa)	Weight (kg)	Max hose length	No.
E	Water	Yes	Black drum/ Blue arm	13 + 2	12,5	12,5	2	16		1
B	Water	Yes	Black drum/ Blue arm	10	12,5	12,5	2	16		2

No.	Part Code
1	30801089
2	30801088


AES OFFER INSTALLATION AND SERVICE SUPPORT FOR ALL EQUIPMENT

NEDERMAN 888/889 HOSE REEL FOOD GRADE

HOSE SPECIFICATION

Hose type	Specification	Temperature range, °C	Hose fittings in free hose end, distribution hose	Hose fitting on free hose end, inlet hose	Hose connection on reel, distribution hose	Hose connection on reel, inlet hose
E	Cover in NBR/PVC and inner tube in food grade quality NBR. Synthetic textile braid.	-30 - 100		Female 60° cone, chrome plated	Male 60° cone	Male 60° cone
B	Cover in NBR/PVC and inner tube in NBR. Synthetic textile braid	-30 - 100			Hose nipple + clip	Hose nipple 1/2" + clip

DIMENSIONS DRAWING

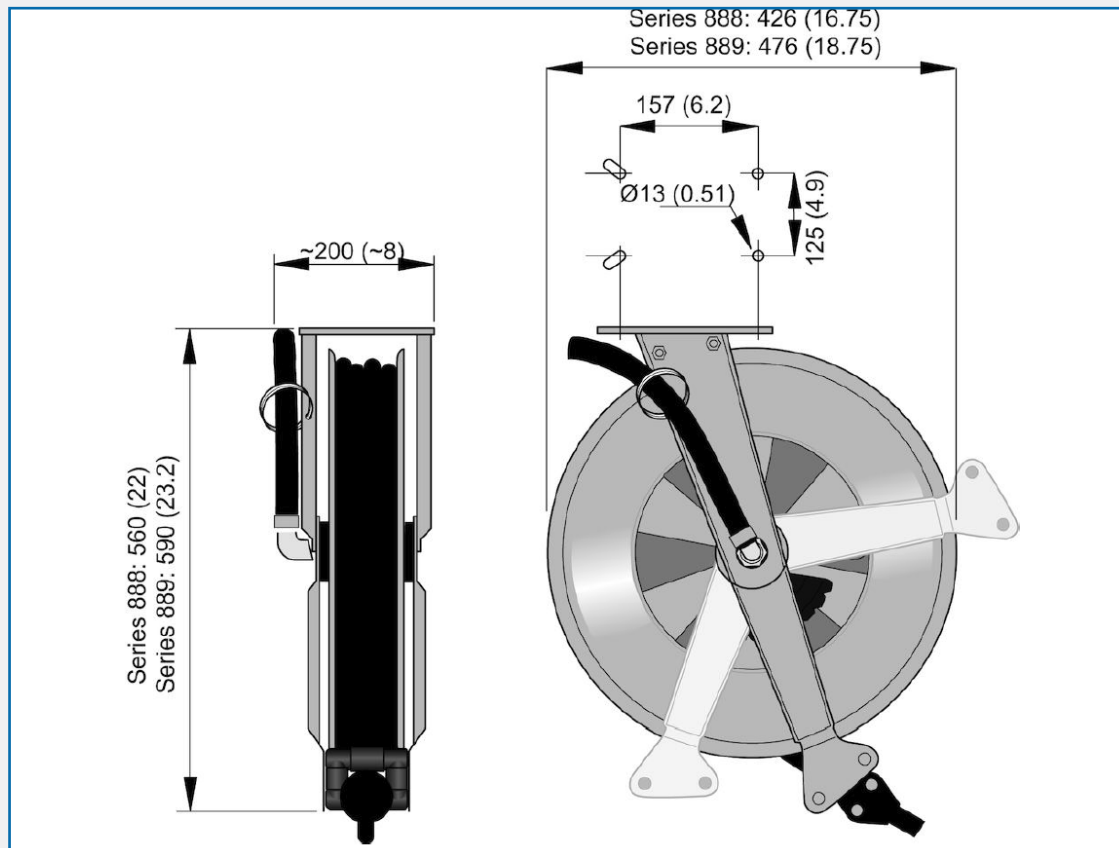

AES OFFER INSTALLATION AND SERVICE SUPPORT FOR ALL EQUIPMENT