

## NEDERMAN 888 HOSE REEL FOR GREASE

### DESCRIPTION

Thanks to the open design, the reels are very easy to service, maintain and keep clean.

Can be installed on wall or on the ceiling.

### FEATURES

- Outlet position can be adjusted through 120° for optimum pull-out and pull-in angle
- Spring power can easily be adjusted from the outside
- Ratchet easily disengaged when required

### TECHNICAL SPECIFICATION

Product Name	Hose Reel 888
Connection hose length (m)	1
Corrosion resistance	Standard
Electric/Spring driven	Spring



### HOSE SPECIFICATION

Type of hose	Media	Delivered with hose	Colour	Distribution hose length (m)	Diameter, connection hose (mm)	Distribution hose diameter (mm)	Max working pressure (Mpa)	Weight (kg)	Max hose length	No.
J	Grease	Yes	Black drum/ Blue arm	15	10	10	35	18		1
J	Grease	Yes	Black drum/ Blue arm	15	6	6	35	16		2
J	Grease	Yes	Black drum/ Blue arm	10	10	10	35	14		3
J	Grease	Yes	Black drum/ Blue arm	15	6	6	35	16		4
J	Grease	No	Black drum/ Blue arm			6	35	11	15	5

AES OFFER INSTALLATION AND SERVICE SUPPORT FOR ALL EQUIPMENT

## NEDERMAN 888 HOSE REEL FOR GREASE


### HOSE SPECIFICATION

No.	Part Code
1	30804288
2	30804888
3	30805088
4	30802688
5	30802588

### HOSE SPECIFICATION

Hose type	Specification	Temperature range, °C	Hose fittings in free hose end, distribution hose	Hose fitting on free hose end, inlet hose	Hose connection on reel, distribution hose	Hose connection on reel, inlet hose
J	Cover and inner tube in synthetic, oil resistant rubber. Double steel braid	-40 - 100	Female 60° cone, chrome plated	Female 60° cone, chrome plated	Male 60° cone	Male 60° cone

### DIMENSIONS DRAWING

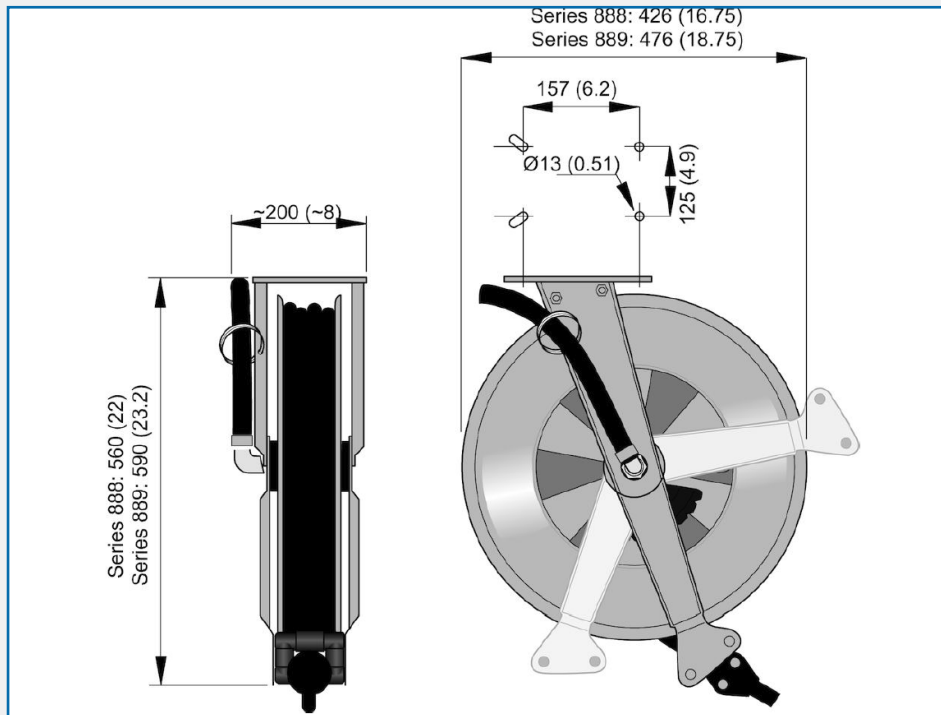

AES OFFER INSTALLATION AND SERVICE SUPPORT FOR ALL EQUIPMENT