

NEDERMAN HOSE REEL 888/889 OIL

DESCRIPTION

Thanks to the open design, the reels are very easy to service, maintain and keep clean.

Can be installed on wall or on the ceiling.

The hose reel 889 is fitted with slightly larger drums and therefore able to take longer hoses than Series 888.

FEATURES

- Outlet position can be adjusted through 120° for optimum pull-out and pull-in angle
- Spring power can easily be adjusted from the outside
- Ratchet easily disengaged when required

TECHNICAL SPECIFICATION

| | |
|----------------------------|-------------------|
| Product Name | Hose Reel 888/889 |
| Connection hose length (m) | 1 |
| Corrosion resistance | (Standard) |
| Electric/Spring driven | (Spring) |



HOSE SPECIFICATION

| Type of hose | Media | Delivered with hose | Colour | Distribution hose length (m) | Diameter, connection hose (mm) | Distribution hose diameter (mm) | Max working pressure (Mpa) | Weight (kg) | Max hose length | No. |
|--------------|-------|---------------------|-------------------------|------------------------------|--------------------------------|---------------------------------|----------------------------|-------------|-----------------|-----|
| | OIL | No | Black drum/ Blue arm | | | 12,5 | 7,5 | 11 | 15 | 1 |
| I | OIL | Yes | Black drum/ Blue arm | 15 | 12,5 | 12,5 | 7,5 | 16 | | 2 |
| I | OIL | Yes | Black drum/ Blue arm | 20 | 12,5 | 12,5 | 7,5 | 16 | | 3 |
| I | OIL | Yes | Black drum/ Blue arm | | | 12,5 | 7,5 | 16 | | 4 |
| I | OIL | Yes | Black drum/ Blue arm | 10 | 12,5 | 12,5 | 7,5 | 16 | | 5 |
| I | OIL | Yes | Black drum/ Blue arm | 10 | 12,5 | 12,5 | 7,5 | 16 | | 6 |

AES OFFER INSTALLATION AND SERVICE SUPPORT FOR ALL EQUIPMENT

NEDERMAN HOSE REEL 888/889 OIL


HOSE SPECIFICATION

| Type of hose | Media | Delivered with hose | Colour | Distribution hose length (m) | Diameter, connection hose (mm) | Distribution hose diameter (mm) | Max working pressure (Mpa) | Weight (kg) | Max hose length | No. |
|--------------|-------|---------------------|-------------------------|------------------------------|--------------------------------|---------------------------------|----------------------------|-------------|-----------------|-----|
| I | OIL | No | Black drum/ Blue arm | | | 12,5 | 7,5 | 11 | 10 | 7 |

| No. | Part Code |
|-----|-----------|
| 1 | 30801589 |
| 2 | 30801689 |
| 3 | 30802489 |
| 4 | 30804489 |
| 5 | 30804688 |
| 6 | 30801688 |
| 7 | 30801588 |

| Hose type | Specification | Temperature range, °C | Hose fittings in free hose end, distribution hose | Hose fitting on free hose end, inlet hose | Hose connection on reel, distribution hose | Hose connection on reel, inlet hose |
|-----------|--|-----------------------|---|---|--|-------------------------------------|
| I | Cover and inner tube in SBR based rubber. Single steel braid. | -40 - 100 | -40 - 100 | Female 60° cone, chrome plated | Male 60° cone | Male 60° cone |

DIMENSIONS DRAWING

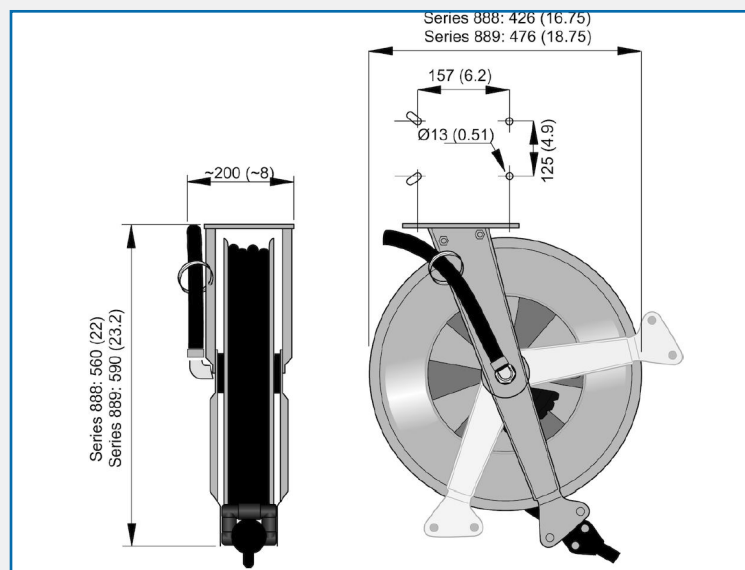

AES OFFER INSTALLATION AND SERVICE SUPPORT FOR ALL EQUIPMENT