

NEDERMAN HOSE REEL 893



TECHNICAL SPECIFICATION

Material recycling	100 %
Connection hose length	1 m
Colour	Black drum/Blue cover
Weight	14,5 kg
Note	For suction hose
Corrosion resistance	Standard
Electric/Spring driven	Spring

FEATURES

- Open design for easy cleaning and servicing
- Unique stand design offers mounting flexibility

DESCRIPTION

Medium-sized reel in robust open design. Thanks to the open design, the reels are very easy to service, maintain and keep clean.

Can be installed on wall or on the ceiling. Versatile and easily installed in industrial and workshop environments.


Type of hose	Media	Delivered with hose	Distribution hose length (m)	Diameter, connection hose (mm)	Distribution hose diameter (mm)	Max working pressure (Mpa)	Max hose length	No.
	Compressed air, water	No	10		12.5	1.5	10	1
	Compressed air, water	No	15		10	1,5	15	2
B	Compressed air, water	Yes	15	12,5	10	1,5		3
	Water high pressure	No	15		10	25	15	4
G	Water high pressure	Yes	15	10	10	25		5
J	Grease	Yes	15	6	6	35		6
I	Oil	Yes	10	12,5	12,5	7,5		7
B	Compressed air, water	Yes	10	12,5	12,5	1,5		8
	Oil	No	10		12,5	7,5	10	9
	Grease	No	15		6	35	15	10
		No	10		12,5		10	11
E	Compressed air, water	Yes	10	12,5	12,5	2		12

AES OFFER INSTALLATION AND SERVICE SUPPORT FOR ALL EQUIPMENT

NEDERMAN HOSE REEL 893

No.	Model
1	30800793
2	30800393
3	30800693
4	30801793
5	30801893
6	30802693
7	30801693
8	30800893
9	30801593
10	30802593
11	30804993*
12	30801093

HOSE REEL 893 DIMENSIONS

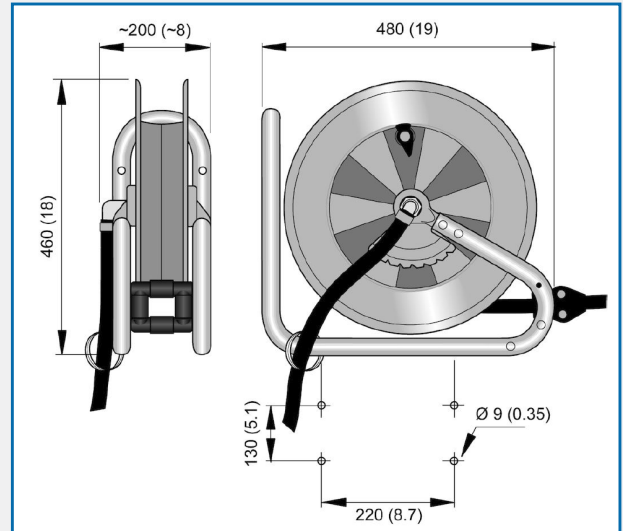

*For suction hose

HOSE REEL 893 SPECIFICATIONS

Hose type	Specification	Temperature range, °C	Hose fitting on free hose end, inlet hose	Hose connection on reel distribution hose	Hose connection on reel, inlet hose
B	Cover in NBR/PVC and inner tube in NBR. Synthetic textile braid	-30 - 100		Hose nipple + clip	Hose nipple 1/2" + clip
G	Cover and inner tube in synthetic rubber. Single steel braid	-40 - 155	Female 60° cone, chrome plated	Male 60° cone	Male 60° cone
J	Cover and inner tube in syntetic, oil resistant rubber Double steel braid	-40 - 100	Female 60° cone, chrome plated	Male 60° cone	Male 60° cone
I	Cover and inner tube in SBR based rubber. Single steel braid	-40 - 100	Female 60° cone, chrome plated	Male 60° cone	Male 60° cone
E	Cover in NBR/PVC and inner tube in food grade quality NBR. Synthetic textile braid	-30 - 100	Female 60° cone, chrome plated	Male 60° cone	Male 60° cone

AES OFFER INSTALLATION AND SERVICE SUPPORT FOR ALL EQUIPMENT

NEDERMAN HOSE REEL 893

HOSE REEL 893 DIMENSIONS

Image	Accessory	Part No.
	Roller guide	30341550
	Pivoting bracket	30372407
	Water gun in chromium plated brass	30400110
	Water gun in stainless steel	30400210
	Watergun EX	30400211
	High temperature water gun	30400310
	Air gun, standard	30410110
	Swivelling coupling 3/8(m) - 3/8(m)HP	30431310

AES OFFER INSTALLATION AND SERVICE SUPPORT FOR ALL EQUIPMENT

NEDERMAN HOSE REEL 893

HOSE REEL 893 DIMENSIONS

Image	Accessory	Part No.
	Swivelling coupling 3/8(m) - 3/8(m)HP SS	30431410
	Swivelling coupling 1/2(m) - 3/8(f) brass	30431510
	Swivelling coupling 1/2(m) - 1/2(f) brass	30431610
	Swivelling coupling 1/2(m) - 3/4(f) bra	30431710
	Swivelling coupling 1/2(m) - 3/8(f) SS	30431810
	Swivelling coupling 1/2(m) - 1/2(f) SS	30431910
	Swivelling coupling 1/2(m) - 3/4(f) SS	30432010

AES OFFER INSTALLATION AND SERVICE SUPPORT FOR ALL EQUIPMENT