

RJH DEER BENCH-MOUNTED BANDFACER



TECHNICAL SPECIFICATION

Motor	1PH 0.75 kW 3PH 1.5 kW
Motor Speed	1500 RPM
Electrical Supply	1PH 230V, 50Hz 3PH 400V, 50Hz
Belt Size (W x L)	150 x 1090 mm
Belt Speed	6.5 m/sec
Work Table Size (W x D)	278 x 226 mm
Weight	77 kg
Dimensions (W x D x H) mm	580 x 565 x 585
Table Tilt	90° and 165°
Working Height	300 mm

DESCRIPTION

The RJH Deer Bench-Mounted Bandfacer has been developed in co-operation with practitioners in Design & Technology education, and incorporates many improvements in styling, safety and finish. Particular attention has been given to noise reduction, ergonomic design and user-friendly features and stop controls.

The Deer is suitable for use on wood, acrylic and metal and quick action calibrated table and adjustable protractor guide. This machine carries a two year warranty and is supplied with a comprehensive operating manual.

OPTIONAL REFINEMENTS

- 3000rpm version - for metalwork only
- Flexible LED Light
- Lockable triple pole isolator
- Lockable 'E' Stop


AES PART CODE/ORDERING TABLE

RJH Deer Bench-Mounted Bandfacer (1PH)	WE-BS01-001
RJH Deer Bench-Mounted Bandfacer (3PH)	WE-BS01-003

FEATURES

- Fully compliant with the European Machinery Directive and BS 4163:2007
- Calibrated tilting table for operating positions between 90 degrees and 135 degrees
- Adjustable protractor guide
- Duplex cams for quick-change belt replacement and alignment
- Supplied with 150mm x 1090mm aluminium oxide abrasive belt
- No-volt overload push-button starter
- 110 volt control circuit
- Full guarding including adjustable front belt guard for maximum finger protection
- Comprehensive operating manual

SAFE WORKING AREA

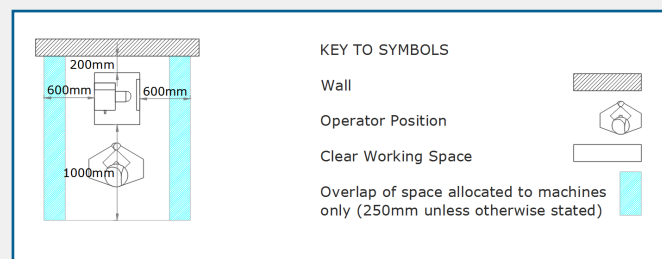

AES OFFER INSTALLATION AND SERVICE SUPPORT FOR ALL EQUIPMENT