

RJH EXTRACTION MOUNTED CHAMOIS POLISHER



TECHNICAL SPECIFICATION

Dimensions (HxWxD)	1205 x 914 x 934 mm (working height)
Weight	95 kg
Motor	1.1 kW
Motor Speed	3 ph: 1440 rpm 1 ph: 1415 rpm
Power Requirements	400V/3 ph/50 Hz 230V/1 ph/50 Hz Fused switch disconnector
Extraction Motor	0.55kW
Mop Size	200mm diameter x 25mm wide
Spindle	20mm diameter

DESCRIPTION

A double ended polisher mounted with an integrated dust extraction unit, built on a robust steel base unit. This RJH Extraction-mounted CHAMOIS Polisher is ideal for use in schools and colleges. It complies with the UK COSHH regulations.

FEATURES

- Heavy duty adjustable polycarbonate eye shields
- No-volt overload push button controls
- Large adjustable mop guards
- Comes supplied with two mops - one stitched calico and one loose leaf
- 110V control circuit
- Motor thermal overload protection
- Protective sleeves on taper nose on both sides of the mop

OPTIONAL REFINEMENTS

- Flexible LED floodlight
- Lockable triple pole isolator
- Parallel adaptors
- Lockable "E" Stop

AES PART CODE/ORDERING TABLE


RJH Extraction Mounted Chamois Polisher (1PH)	WE-MP01-001
RJH Extraction Mounted Chamois Polisher (3PH)	WE-MP01-003

OPTIONAL EQUIPMENT

PART No.

Polishing Mop Stitched 200x25 mm	950-272
Polishing Mop Unstitched 200x25mm	950-275
Polishing Mop Sisal 200x25mm	950-278
Ferro Brite (Grey)	950-260
Tripoli Composition (Brown)	950-261
Brite Lea Compound (White)	950-262
Vonax Compound	950-263
Radio Rouge for Polishing Silver (300g Bar)	950-264

SAFE WORKING AREA

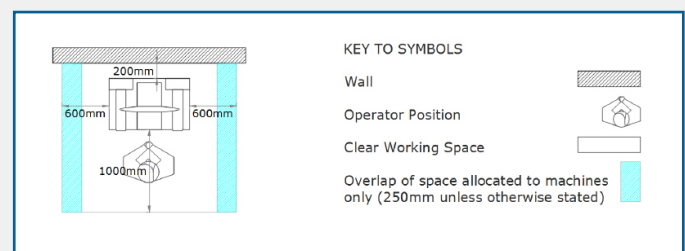

AES OFFER INSTALLATION AND SERVICE SUPPORT FOR ALL EQUIPMENT