


# BAGPRESS PRO4 ELECTRIC VACUUM PRESS

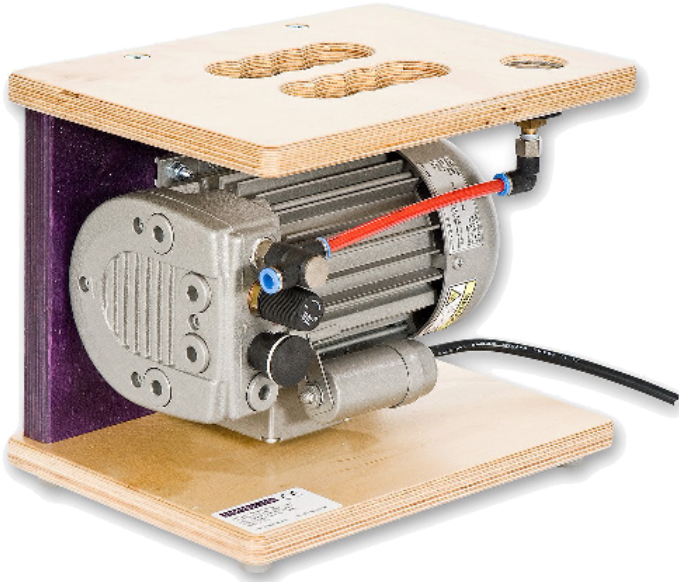

## TECHNICAL SPECIFICATION

Vacuum Flow Rate	4 m <sup>3</sup> /hr
Vacuum level	85% - 8.5 tonnes/m <sup>2</sup>
No. of ports	1 8mm
Port Format	Desk top Plywood frame
Standard Bag Size	one bag @ 1300 x 2500 mm
Maximum bag size	one bags @ 1300 x 3000 mm
Power	1PH 230V
Weight	10kg
Dimensions	300 (L) x 210 (D) x 245 (H) mm

## DESCRIPTION

The most efficient and effective way to clamp veneering work and light weight laminations. By extracting the air from the vacuum bag and creating a vacuum the full weight of atmospheric pressure, applying a force on the glue line between layers whilst the glue cures. This provides an even and massive clamping pressure over the whole surface for efficient veneering or laminating.

## INCLUDED

- 300 micron polyurethane bag, measuring 1300 x 2500 mm
- Two 1350 mm sealing strips
- Carrying frame for convenience and storage
- Heavy duty footswitch
- Breather fabric
- 8mm polyurethane air hose

## FEATURES

- Evenly distributed pressure of 8.5 tonnes/m<sup>3</sup>
- Built in vacuum gauge for indication of performance
- Adjustable vacuum level
- Footswitch operation
- 100% duty cycle dry running rotary vane pump
- Lacquered birch ply protective frame with carrying handle
- Ideal for single bag veneering and laminating operations

## PART CODE/ORDERING TABLE

Bagpress Pro4 Powered Vacuum Press	WE-PM20-001
------------------------------------	-------------

AES OFFER INSTALLATION AND SERVICE SUPPORT FOR ALL EQUIPMENT