

## TREX EXTRACTION UNIT



### TECHNICAL SPECIFICATION

Filter Area	7.43 m <sup>2</sup>
Dust Collection Capacity	9 litres
Extract Spigot Size	2 x 80Ø or 2 x 100 or 1 x 80 & 1 x 100 or 1 x 120Ø or any combination of Ports totalling max: 850 <sup>3</sup> /hr
Gross Weight	71 kg
Motor Power Rating	0.75kw 2 – Pole 3ph – 1.8 amp. 1ph – 5.1 amp.
Filter Condition Monitoring	Pressure Differential Gauge
ATEX Explosion Relief	None required

### DESCRIPTION

The TREX is built to be the big brother to the already popular FREX Extractor. We have designed it to be a high performance, compact unit which can provide extraction from a wide variety of workshop applications.

Due to its low height it is ideally suited to under-bench applications when a larger filter area or a greater performance is required.

The unit is equipped with 4x cartridge filters to give a total of 7.43 m<sup>2</sup> (80 ft<sup>2</sup>) of filter area. In addition, to this we have also equipped the TREX with HEPA filters.

Example of its applications include:

- Mounting the TREX under a bench and then connecting to 2 - 3 sanders or 4 -5 fret saws.
- Mounting an extraction arm to a bench and then connect it to the TREX extractor which can fitted underneath the bench or into a cabinet.

### FEATURES


- x 4 cartridge filters offering 7.43 m<sup>2</sup> of filter area.
- HEPA after filters.
- Compact and powerful.
- Works especially well for under bench requirements which require a bit more filter area or performance than standard.
- Suitable for a wide variety of applications.




AES OFFER INSTALLATION AND SERVICE SUPPORT FOR ALL EQUIPMENT

## TREX EXTRACTION UNIT

### DIMENSIONS

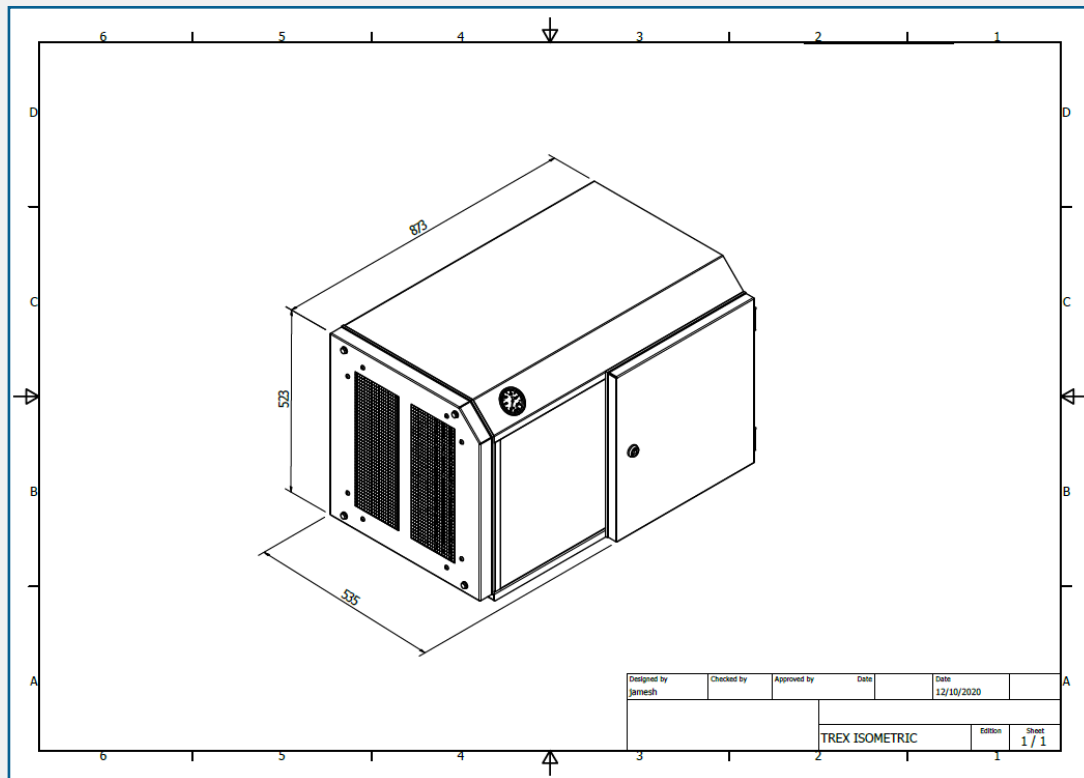

### PERFORMANCE

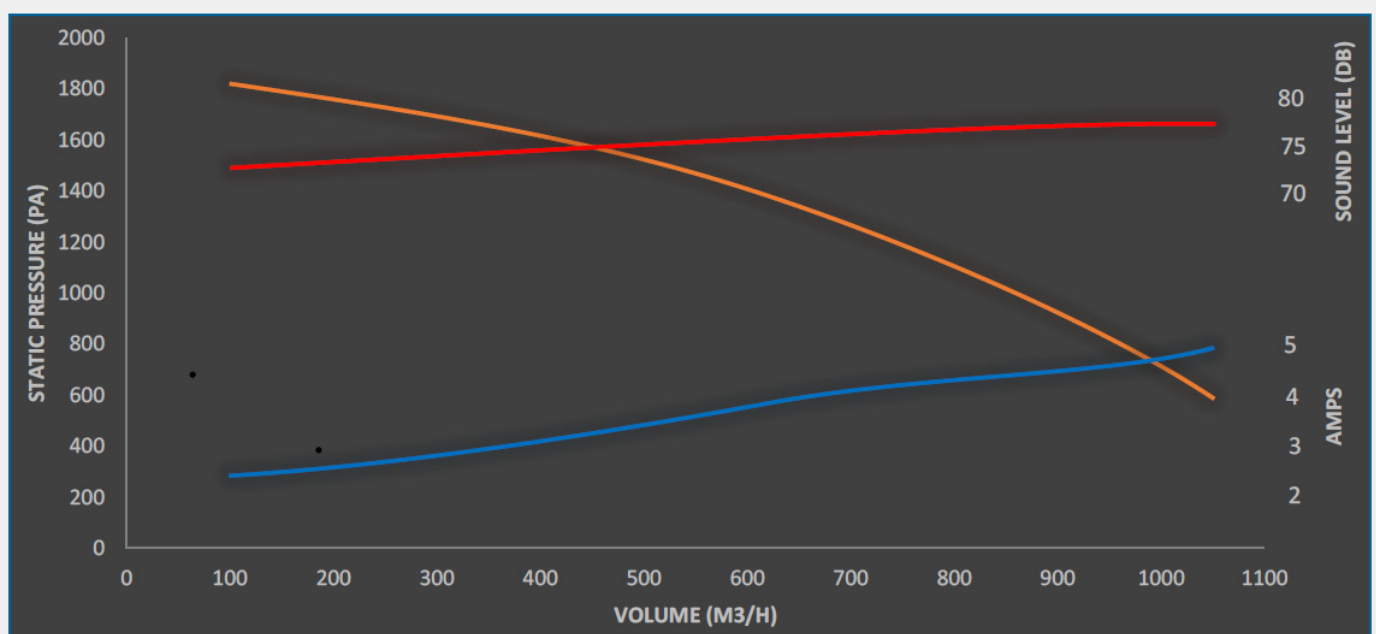

AES OFFER INSTALLATION AND SERVICE SUPPORT FOR ALL EQUIPMENT