

CEVAC C-SERIES VACUUM UNIT



TECHNICAL SPECIFICATION

| Model | C-4FA | C-5FA |
|-------------------------------------|--------------|--------------|
| Dimensions WxDxH [mm] | 780x550x1600 | 780x550x1600 |
| Weight (approx.) [kg] | 75 | 95 |
| Voltage [V] | 400 | 400 |
| Current strength [A] | 9.5 | 13.3 |
| Power 50Hz [kW] | 4 | 5.5 |
| Air volume [m ³ /h] | 550 | 700 |
| Vacuum [mbar] | -280 | -280 |
| Filter surface [m ²] | 8.4 | 8.4 |
| Filtration [%BAPTISM] | 98.89 | 98.89 |
| Dust container [l] | 35 | 35 |
| No. of users | 1-3 | 1-4 |

DESCRIPTION


The CEVAC C series is a compact machine that can be equipped with functions usually found on our larger systems.

Features such as automatic filter cleaning, level monitoring, purge valves, filter monitors, etc. can be configured. These machines use motors with IE3 design improving the energy efficiency standard of the system.

The frequency-controlled models are equipped with Lenze frequency converters as standard and can be upgraded to Vacon drives if desired.



DIMENSIONS DRAWING

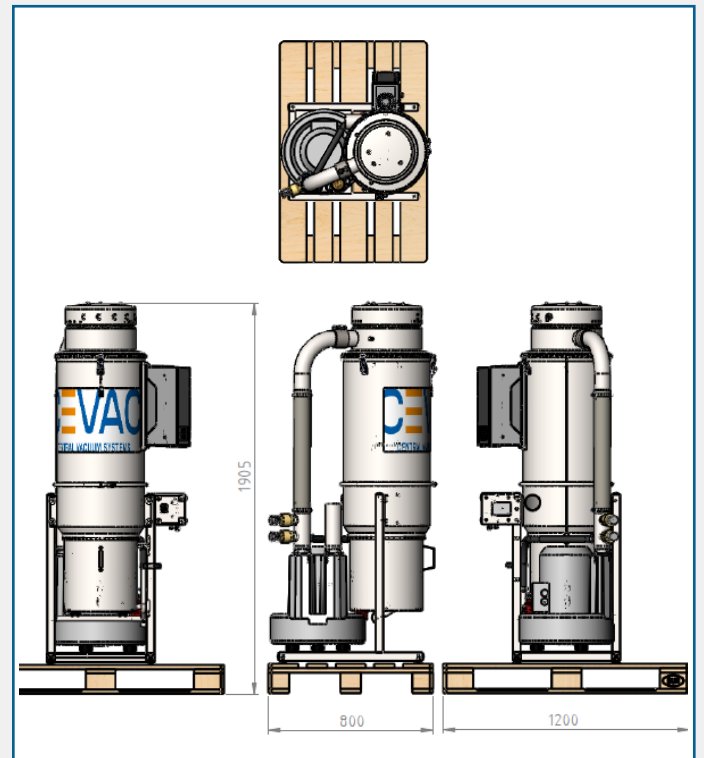

AES OFFER INSTALLATION AND SERVICE SUPPORT FOR ALL EQUIPMENT