



NEDERMAN ORIGINAL CR ARM

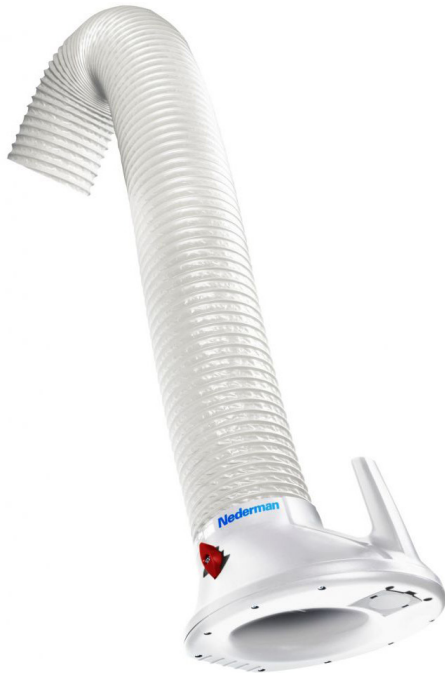

DIMENSIONS - MOUNTING

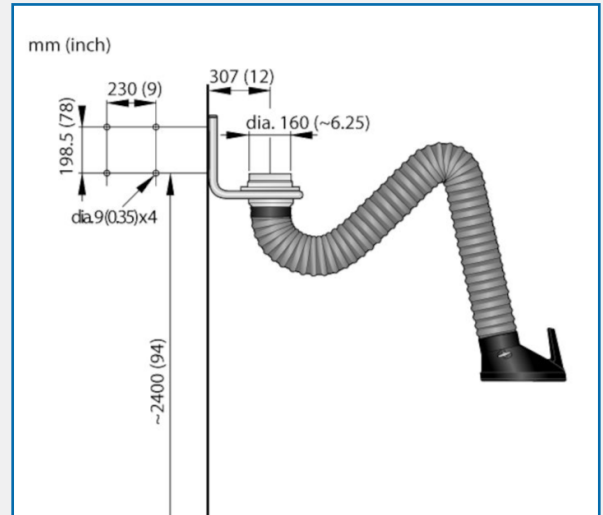


DESCRIPTION

It is specially designed for working environments with fumes, vapours or non explosive dust. The arm has extended corrosion protection since all aluminium details including the arm are anodised. Typical workplaces are the food, pharmaceutical and chemical industries, and any other industry where an easily positioned corrosion-resistant.

- Swivel allows the product to rotate 360°.
- Flexible in all directions and simple to position.
- Equipped with a damper in the hood as standard.
- The hood can be tilted in all directions.
- The product can be mounted in combination with different brackets, extension arms, on a rail system or on fixed or mobile filter equipment.

PRESSURE DROP GRAPH

Static Pressure (Pa)

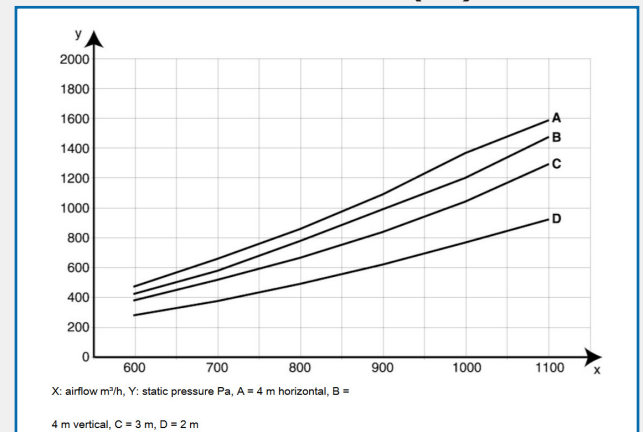

Airflow m³/h

AES PART CODE/ORDERING TABLE


Part No.	Description	Reach (m)	Airflow, (m³/h)	Connection Ø (mm)	Max. Temperature	Noise Level at Hood (dB(A))	Weight (kg)	AES Part Code
10532535	Original Arm CR 2m	2	700-1000	150/160	70°C	63-75	11	DF-EA02-001
10532235	Original Arm CR 3m	3	700-1000	150/160	70°C	63-75	13	DF-EA02-002
10532335	Original Arm CR 4m - Vertical	4	700-1000	150/160	70°C	63-75	16	DF-EA02-003
10532435	Original Arm CR 4m - Horizontal	4	700-1000	150/160	70°C	63-75	16	DF-EA02-004

AES OFFER INSTALLATION AND SERVICE SUPPORT FOR ALL EQUIPMENT


NEDERMAN ORIGINAL CR ARM - Spare Parts



1



2

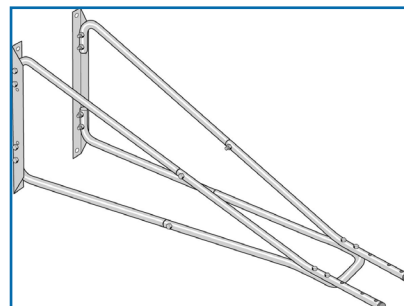

3



4



7



6



5

SPARE PART CODE/ORDERING TABLE

Reference	Description	Part No.
1	Wall bracket for extraction arm	10550635
2	Wall Bracket 1 m	10550735
3	Wall Bracket 2 m	10550835
4	LED light/fan switch Original	10376922
5	Hose PE-EL 160/2m black	10374423
5	Hose PE-EL 160/3m black	10374424
5	Hose PE-EL 160/4m black	10374425
5	Hose PE-EL 160/5m black	10374426
6	Airflow indicator 500-400 Pa	10375373
6	Airflow indicator 40-600 Pa	10375354
7	Transformer 230/250 V to 24 V. 75 VA.	10361560
7	Transformer 230/250 V to 24 V. 24 VA.	10363189

AES OFFER INSTALLATION AND SERVICE SUPPORT FOR ALL EQUIPMENT