

## NEDERMAN INDUSTRIAL VACUUM CLEANER 221A



### TECHNICAL SPECIFICATION


|                             |   |
|-----------------------------|---|
| Max. Airflow                | 342 m <sup>3</sup> /h                                 |
| Compressed Air Requirements | 3.0 Nm <sup>3</sup> /min                              |
| Max. Negative Pressure      | -52 kPa   |
| Hose Diameter               | Ø51 mm  |
| Hose Length                 | 7.5 m   |
| Type of Hose                | PE/C  |
| No. of Filter Elements      | 1   |
| Filter Material             | Microfibre  |
| Filter Type                 | Cartridge   |
| Noise Level                 | 75.3 dB(A)  |
| Note                        | With cleaning set, brush, conical and toothed nozzle. |

**Nederman**

### ACCESSORIES

| Item  | Part Code |
|---|-----------|
| Pneumatic timer for ejector   | 43212001  |
| Electrical control system for ejectors NE 22-76   | 43220001  |
| Timer electrical control for ejector NE 22-76, without control box. Mounted on the compressed air connection. | 43220026  |
| Timer electrical control for ejector NE 86-96, without control box. Mounted on the compressed air connection. | 43222008  |

### 221A FLOW DIAGRAM

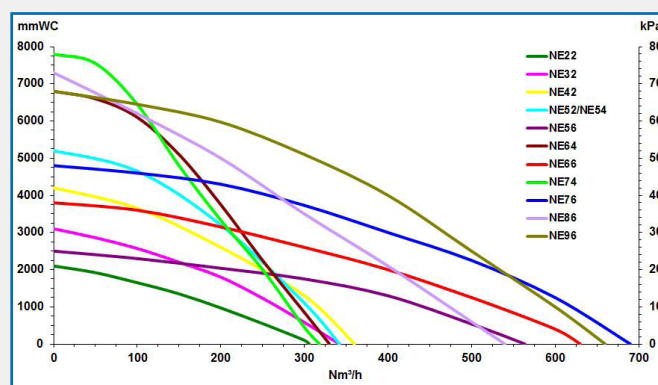

Air powered ejectors  
All performance data are based on 7 bar supply pressure

### PART CODE/ORDERING TABLE

| Hose Type | Specification   | Temperature range, °C   |
|-----------|---|-------------------------|
| PEC       | For cleaning applications, Max vacuum 50 kPa.<br>Conductivity < 10 <sup>6</sup> Ohm | -40 Deg. C - +60 Deg. C |

AES OFFER INSTALLATION AND SERVICE SUPPORT FOR ALL EQUIPMENT