

NEDERMAN 425A INDUSTRIAL VACUUM CLEANER



TECHNICAL SPECIFICATION

Certifications	CE
Compressed Air Requirement	3,0 Nm ³ /min
Hose Diameter (mm)	51
Hose Length (m)	7,5
Max Airflow (m ³ /h)	342
Max Vacuum (kPa)	-52
Noise Level (dB(A))	75,5
Type of Hose	PVC
Weight (kg)	119

ACCESSORIES

Control Spneum for NE	43212001
Control S for NE 22-76	43220001
Control S for NE 22-76	43220026
Control S for NE 22-76	43222008

DESCRIPTION

Dual container system, designed for removal of industrial waste. This powerful suction unit comes equipped with a silo and filter container fitted with our exclusive nederman vyon self-cleaning filter ensuring the efficient filtration of large quantities of dust. The filter is cleaned automatically when the air supply is turned off.


Special swivelling, locking wheels are sized to increase mobility, and make the handling of heavy loads especially simple. The unit is equipped with an adjustable counterweight valve and sack holder for discharge into sacks. The model include slots for handling by forklift.

- Dry waste suction
- Silo pre-separator with manual outlet valve
- Fork lift handling
- Sturdy trolley system with large wheels for uneven ground
- Automatic filter cleaning

FEATURES

- Bullet points for features

PERFORMANCE GRAPH

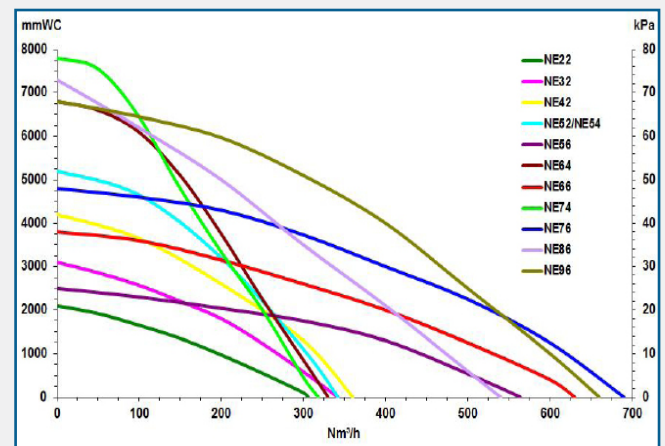

PART CODE/ORDERING TABLE

425A - NE52	42142500
-------------	----------

AES OFFER INSTALLATION AND SERVICE SUPPORT FOR ALL EQUIPMENT