

# GEOVENT MOBILE TROLLEY WITH ASA-3 EXTRACTION ARM



## ORDERING TABLE

Part. No.	Description
10-270-2W	Mobile Extractor with 2m ASA
10-270-3W	Mobile Extractor with 3m ASA

## ARM ACCESSORIES

Part. No.	Description
12-005	Damper Ø80 mm
12-006	Damper Ø100 mm
12-012	Damper Ø125 mm
12-008	Damper Ø160 mm
12-009	Damper Ø200 mm

## DESCRIPTION

The Geovent Mobile Trolley with ASA-3 Extraction Arm is designed for use in repair shops for gluing, welding and exhaust gases.

Normally, this extractor is fitted with the ASA-3 Extraction Arm and the MSFG Fan.

## CONSTRUCTION

The Mobile Trolley is equipped with a MSFG-200-3 Fan, 3 x 400 V with 10 m cable and an ASA-3 Arm Ø160 mm. It comes with a 5 m discharge hose Ø160 mm.

Black painted steel construction with wheel and low center of gravity.

Height (without arm): 1700 mm.

## USE OF THE MOBILE TROLLEY


The Mobile Trolley is designed for the extraction of welding fumes, vapors etc. in environments where it is not possible to establish permanent extraction points.

The fan must not be used in categorised areas such as ATEX zones, for example for the extraction of aluminium, flour, textile and wood dust as well as other media such as is associated with explosion hazard.

The Trolley can be handled and moved by pulling the unit.

!/ Do not start the Geovent Mobile Trolley Extractor without the discharge hose mounted, as it can cause engine overload.

## CHASSIS & WHEELS

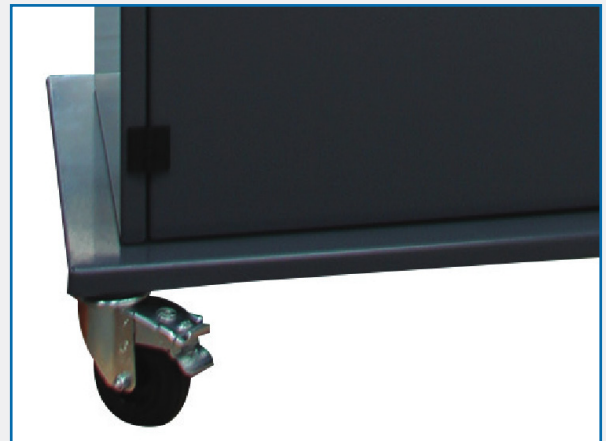

AES OFFER INSTALLATION AND SERVICE SUPPORT FOR ALL EQUIPMENT