

OMF 6000



DESCRIPTION

Nederman OMF oil mist eliminators are designed to handle large amounts of emulsion mist during continuous operation. They are developed with focus on high efficient filtration together with low maintenance cost.


Nederman OMF 6000 has as standard 3 filter-stages where the first 2 stages consists of filter cassettes with Nederman's FibreDrain® technology. Nederman have a wide range of different types of filters to suit many different kind of applications. The third stage consists of a HEPA filter in filter class H13 with an efficiency of 99,95% for MPPS according to EN1822. All tower built Nederman OMF units are prepared for use of pre filter. OMF 6000 have a top mounted radial fan.

FEATURES

- Three filter stages, optional pre-filter
- Gauges for reading of pressure drop over each filter stage
- Extension legs
- Two inlet inlet \varnothing 400 mm with clamp ring connection

TECHNICAL SPECIFICATION

Capacity (max airflow m3/h)	6000
Certifications	CE
Filter efficiency (%)	99.95
Installation	Indoor
Material	Sheet metal, painted both in- and outside.
Operating Temperature	60 deg C (limited by filter)
Protection class	IP55
Standard	2009/125/EC
Volume (for shipping) (m3)	9.48
Working pressure (kPa)	Max 4500 Pa
Amperage (A)	19.5 / 11.3
Colour	NCS-S 1005 B20G
Frequency (Hz)	50
Number of filter elements	9
Noise level (dB(A))	70 dB(A) @1.5 m from service side
No of phases	3
Power (kW)	11
Power Voltage (V)	400 / 690
Weight (kg)	355
Note	Plus 2 optional filter elements. Incl extension legs.

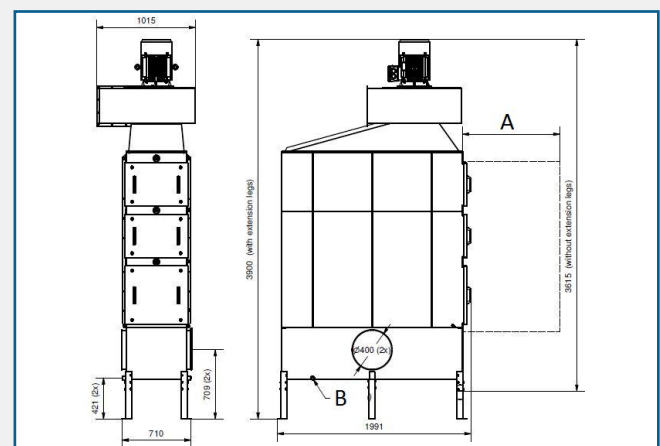

AES OFFER INSTALLATION AND SERVICE SUPPORT FOR ALL EQUIPMENT