


NOVEX™ FILTER ISOLATION VALVE DN71-DN100

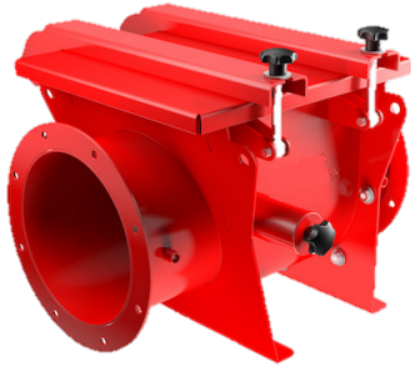

OPERATION

When stopped and in normal operation, the valve blade is held open by two magnets.

If during operation of the process, an explosion occurs behind the valve, the airflow is immediately reversed by the rise in pressure and the rest of the installation upstream of the valve is effectively isolated from the propagation of the explosion.

The blade remains locked in the closed position. A hinged inspection hatch at the top of the valve allows easy access for critical point checks such as dust accumulation or seal condition.

DESCRIPTION

The Novex valve is an explosion-proof flap valve certified as a protection system according to Directive 94/9/EC and according to EN16447: 2014. It is completely autonomous and must be installed on a horizontal piping, at a certain distance from the protected volume.


OPTIONS

- Open position sensor
- Locked signalling sensor
- Dust accumulating sensor
- Pneumatic cleaning system

ADVANTAGES

- Available from DN71 to DN1000.
- Automatic locking of the valve in the closed position in case of explosion.
- Painted carbon steel (MS) or stainless steel (SS) 304 finish
- Pred max 1 or 2 bar, depending on DN and type of dust
- Organic or metal dust St3 Kst max 440 bar.m / s

DIMENSION SCHEMATIC

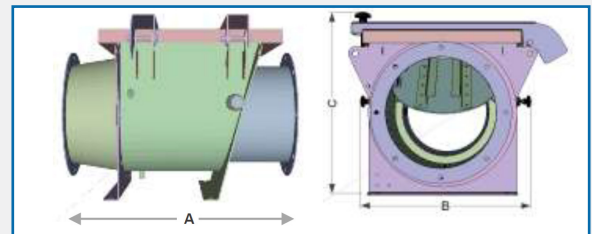

TECHNICAL SPECIFICATION

Main Characteristics																									
Application	Dust explosion compartmental valve according EN16447:2014																								
Types of Dusts	Organic and metallic dust. Toxic dust excluded																								
Dust Class	St3 / Kst max 440 bar.m/s (Pmax. 9.5 barg)																								
Dust Load	Maximum 500 g/m ³																								
Mounting	Horizontal, on vacuum line (pull assembly)																								
Bends before Filter	2 bends maximum (bend curvature radius / diameter ≥ 1)																								
Flange	DIN24154 /R2 (counter flanges optionally available)																								
Construction	Painted carbon steel (RAL3020) or stainless steel AISI304																								
Temperature limits	≤ 85°C (peak 100°C) for steel version										≤ 230° for stainless steel version														
Atex Marking	CE 0080 Ex D EN16447 LOM11 ATEX 7047X																								
Maximum Air Speed	30 m/s																								
Diameter DN	71	80	100	125	150	180	200	250	280	300	315	355	400	450	500	560	600	630	710	800	900	1000			
Length A (mm)	440	449	469	494	519	549	569	619	649	669	684	724	769	819	869	928	969	1000	1079	1169	1269	1369			
Width B (mm)	349	358	386	403	428	458	486	600	647	650	703	742	788	837	888	1000	1040	1074	1153	1243	1343	1443			
Height C (mm)	265	274	294	319	344	374	394	486	523	536	555	589	637	684	745	827	863	902	1007	1097	1197	1297			
Opening radius (mm) *											488	518	538	553	593	638	688	738	833	873	903	985	1075	1174	1274
Weight (kg±10)	17	18	20	23	28	30	32	45	51	53	64	77	82	93	102	140	155	162	195	225	265	303			
Air Loss (mm CE) **	10	10	10	10	15	15	15	20	20	25	25	30	35	35	35	35	35	40	40	45	50	50			
Organic Dust	MESG 1.6 (mm)																								
Pred max	2 bar										1 bar														
Mounting Distance ***	3 to 10 metres										5 to 13 metres														
Metal Dust	MESG 1.6 (mm)																								
Pred max	2 bar										1 bar														
Mounting Distance	2 to 9 m										4.5 to 12 metres														

AES OFFER INSTALLATION AND SERVICE SUPPORT FOR ALL EQUIPMENT