

Portable Fume Extraction System

FEX-PRO



Portable, simple to install and quiet in operation.

The most effective way to capture harmful welding fumes is by extracting them at the source with a fume extraction welding torch & system.

The FEX-PRO, exclusively available from **ABICOR BINZEL UK**, is an economical choice with excellent quality build and functionality.

As standard, the FEX-PRO is equipped with filter blocked warning capabilities; both visual and audible which helps avoid down time.

It also features a brushless motor for low maintenance.

Features and benefits :

- Auto sensing dual voltage (110 or 230V)
- Continuous rated brushless motor
- Equipped with a cleanable primary filter and a H14 HEPA secondary filter
- Adjustable extraction/flow rate...



H14
Secondary filter

Up to ...
99%.997
HEPA efficiency



Torch Type	Filter Efficiency	Voltage	Pages
FEX-PRO	> 99.997%	110 - 230V	216 - 217

**You weld,
protect.**















FEX-PRO

Portable Fume Extraction System

You **weld,**
protect.

Technical Data :


	Mains Voltage : 110 - 230 V 50/60 Hz
	Dimensions : 504 x 305 x 592 mm
	Max. Air Flow : 180 m³/h
	Device Weight : Approx 30 kg
	Motor Power : 1.1kW
	Noise Level : < 60 dB (A)
	Connection Diameter : 50 mm
	Max. Vacuum: 21,000 Pa
	Cleanable Filter
	Perminant Air Line Required
	Brushless Motor
	Auto Start/Stop



Every brand new FEX-PRO includes :



5 metre extraction hose with connectors



1 x Primary Filter
1 x Secondary Filter



Automatic start-stop lead

- Made exclusively for ABICOR BINZEL UK
- Auto sensing dual voltage (110 or 230V)
- Continuous rated brushless motor
- Cleanable primary filter
- H14 HEPA secondary filter
- Adjustable extraction/flow rate

FEX-PRO

115 - 230V

601GB010

FEX-PRO


EXCLUSIVELY FROM
ABICOR
BINZEL



Primary Filter

Replacement filter
dust class M, 0.8m²

601.0008.1

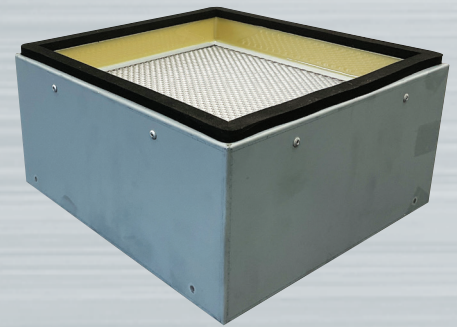

Secondary Filter

Replacement Filter
H14 99.997% / 1.52m²

601GB011

Motor

110 - 230 V 50/60 Hz

601GB022




Automatic Sensor

Start-Stop Sensor

601.0041.1

Hose Connector

Hose Joiner

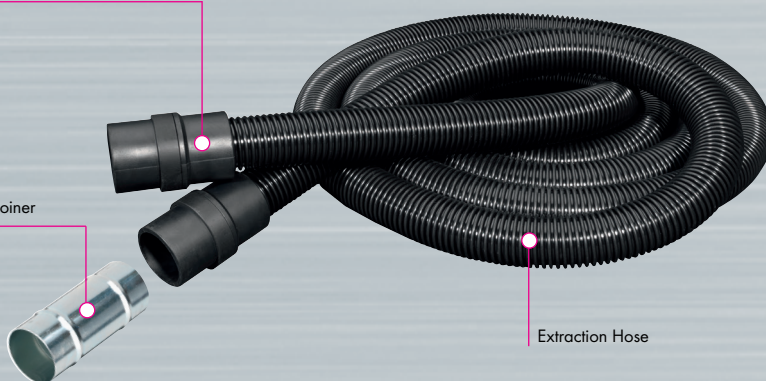

Extraction Hose

5m Extraction Hose (1+2)

601.0015.1

Extraction Hose (per metre) ¹

109.0080.0

Hose Connector ²

601.0116.1

Hose Joiner

601.0046.1



Magnetic Extraction Nozzles

Fish-Tail
Round

LS854000
LS851000

With its funnel style extraction opening (round, rectangular or fish-tail) and magnetic mounting stand, it gives the welder a great amount of flexibility as they are able to position the nozzle directly over their weld.

These types of nozzles can be easily connected to a portable fume extraction unit via an external extraction hose.

See page for more options 220 - 221