


## NEDERMAN 883 HOSE REEL



### DIMENSIONS

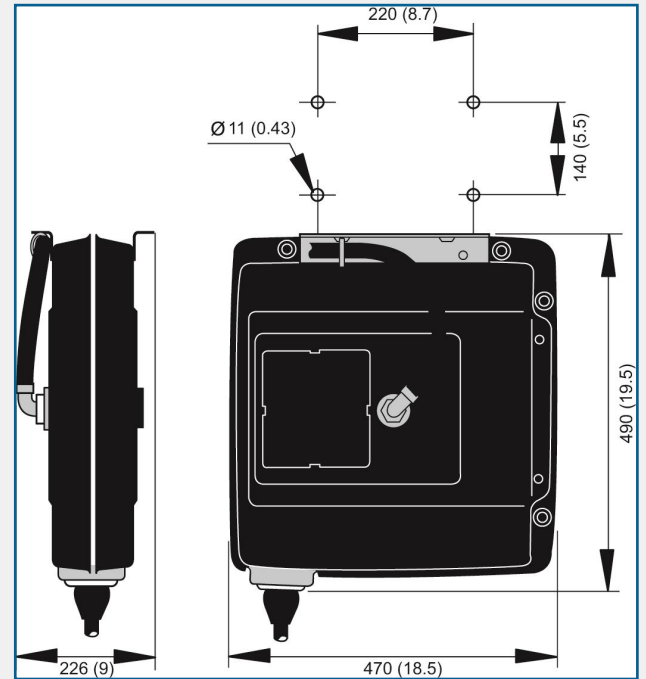

### DESCRIPTION

The Nederman Hose Reel 883 is a fully plate encased and robust, medium sized retractable hose reel. It is a highly suitable hose reel for applications in vehicle repair and maintenance workshops. The retractable hose reel is supplied with loose quick hitch for easy installation.

The hose reel 883 is retractable and has an optimized spring force, ensuring that the hose retracts smoothly and evenly onto the drum. The high quality spring is pre-tensioned at the factory to suit a wide range of applications, and is well protected inside the drum cavity. The self retracting hose reel 883 is very easy to mount, either on walls, ceilings or floors.

### FEATURES

- Spring tension adjustable from the outside.
- Fast and easy to service.
- Simple hose replacement without dismantling the reel.

### TECHNICAL SPECIFICATIONS

Material	Sheet metal casing
Material recycling	100 %
Connection hose length	1 m
Weight	15 kg
Corrosion resistance	Standard
Electric/Spring driven	Spring



AES OFFER INSTALLATION AND SERVICE SUPPORT FOR ALL EQUIPMENT

## NEDERMAN 883 HOSE REEL

### HOSE REELS

Media	Hose Type	Delivered with hose	Distribution Hose Length	Diameter connection hose	Distribution hose diameter	Max Pressure	Model
Compressed Air/Water	-	No	-	-	-	1.5 Mpa	30800783*
Compressed Air/Water		No	-	-	12.5 mm	1.5 Mpa	30800983**
Compressed Air/Water	B	Yes	10 m	12.5 mm	12.5 mm	1.5 Mpa	30801083
Oil	-	No	-	-	12.5 mm	7.5 Mpa	30801183**
Grease	-	No	-	-	6 mm	15 Mpa	30801383**
Water High Pressure	-	No	-	-	10 mm	25 Mpa	30802183**
Water High Pressure	G	Yes	13 m	10 mm	10 mm	25 Mpa	30802283
Water High Pressure	G	Yes	13 m	10 mm	10 mm	25 Mpa	30803883
Water High Pressure	-	No	-	-	10 mm	25 Mpa	30803783*
Oil	I	Yes	10 m	12.5 mm	12.5 mm	7.5 Mpa	30801283
Oil	-	No	-	-	12.5 mm	7.5 Mpa	30806183
Oil	I	Yes	10 m	12.5 mm	12.5 mm	7.5 Mpa	30806283
Grease	J	Yes	15 m	6 mm	6 mm	35 Mpa	30801883
Compressed Air, Water	B	Yes	15 m	12.5 mm	10 mm	1.5 Mpa	30807283
Compressed Air, Water	B	Yes	10 m	12.5 mm	12.5 mm	1.5 Mpa	30851683
Oil	I	Yes	10 m	12.5 m	12.5 mm	7.5 Mpa	30803283
Compressed Air, Water	B	Yes	15 m	-	10 mm	1.5 Mpa	30815483**
Compressed Air, Water	B	Yes	15 m	12.5 m	10 mm	1.5 Mpa	30800883

\*For 10 mm hose

\*\*For 12,5 mm hose

\*\*\*For 6 mm hose

### HOSES

Hose Type	Specification	Temperature range, °C	Hose fitting on free hose end, Inlet hose	Hose connection on reel, distribution hose	Hose connection on reel, inlet hose
B	Cover in NBR/PVC and inner tube in NBR. Synthetic textile braid.	-30 - 100		Hose nipple + clip	Hose nipple 1/2" + clip
G	Cover and inner tube in synthetic rubber. Single steel braid.	-40 - 100	Female 60° cone, chrome plated.	Male 60° cone	Male 60° cone
I	Cover and inner tube in SBR based rubber. Single steel braid.	-40 - 100	Female 60° cone, chrome plated.	Male 60° cone	Male 60° cone
J	Cover and inner tube in synthetic, oil resistant rubber. Double steel braid.	-40 - 100	Female 60° cone, chrome plated.	Male 60° cone	Male 60° cone

AES OFFER INSTALLATION AND SERVICE SUPPORT FOR ALL EQUIPMENT