


NEDERMAN 886 HOSE REEL STAINLESS STEEL



DIMENSIONS

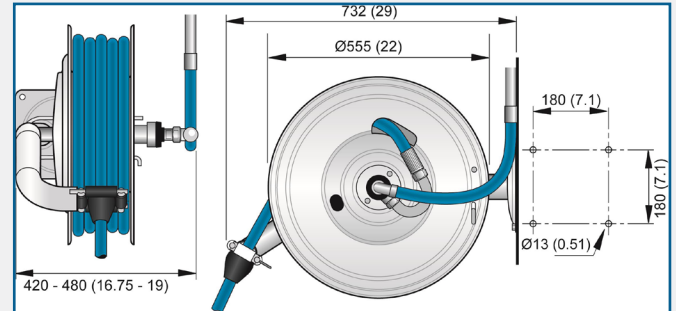

DESCRIPTION

The 886 Hose Reel Stainless Steel is made entirely of stainless steel and designed specifically for the food processing industry.

The hose reel is very easy to clean thanks to its rounded edges and it features an easy to dismantle hose outlet, an externally mounted swivel, and a minimum number of material joints.

FEATURES

- Unique design makes easy cleaning
- Up to 25 m (82 ft.) hose capacity
- Meets international hygienic requirement

TECHNICAL SPECIFICATIONS

Delivered with hose	No
Colour	Stainless
Corrosion resistance	Stainless steel
Electric/Spring driven	Spring



AES OFFER INSTALLATION AND SERVICE SUPPORT FOR ALL EQUIPMENT

NEDERMAN 886 HOSE REEL STAINLESS STEEL

HOSES TYPES

Hose Type	Specification	Temperature range, °C	Hose fittings on free hose end, Inlet hose	Hose connection on reel, Distribution hose	Hose connection on reel, Inlet hose
I	Cover and inner tube in SBR based rubber. Single steel braid.	-40 - 100	Female 60° cone, chrome plated.	Male 60° cone	Male 60° cone
G	Cover and inner tube in synthetic rubber. Single steel braid.	-40 - 155	Female 60° cone, chrome plated.	Male 60° cone	Male 60° cone
H	Cover and inner tube in synthetic rubber. Single steel braid.	-40 - 155	Female 60° cone, stainless steel.	Male 60° cone	Male 60° cone
E	Cover in NBR/PVC and inner tube in food grade quality NBR. Synthetic textile braid.	-30 - 100	Female 60° cone, chrome plated.	Male 60° cone	Male 60° cone
F	Cover in NBR/PVC and inner tube in food grade quality NBR. Synthetic textile braid.	-20 - 100	Female 60° cone, stainless steel.	Male 60° cone	Male 60° cone
N		-20 - 164			

HOSES

Description	Hose Type	Use for	Hose Diameter (mm)	Hose Length (m)	Max working Pressure	Weight	Model No.
		Water High Pressure	10	25	25 Mpa	28 kg	30801386
		Water	12.5	25	10 Mpa	28 kg	30800386
		Water	19	18	2 Mpa	28 kg	30800186
		Water	25	10	2 Mpa	28 kg	30802186
			19	18	0.6 (Steam, 160 °C) 2.0 (Water)	28 kg	30805286
			25	10	0.6 (Steam, 160 °C) 2.0 (Water)	28 kg	30805086

CONNECTION HOSES

Description	Hose Type	Use for	Hose Diameter (mm)	Max working Pressure	Model No.
Connection Hose (1m)	I	Water	12.5	10 Mpa	30344854
Connection Hose (1m)	G	Water High Pressure	10	25 Mpa	30344852*
Connection Hose (1m)	H	Water High Pressure	10	25 Mpa	30373669**
Connection Hose (1m)	E	Water, Food	12.5	2 Mpa	30373670**
Connection Hose (1m)	E	Water, Food	19	2 Mpa	30373674**
Connection Hose (1m)	E	Water, Food	25	2 Mpa	30373664*
Connection Hose (1m)	F	Water, Food	12.5	2 Mpa	30373671***
Connection Hose (1m)	F	Water, Food	19	2 Mpa	30373675**
Connection Hose (1m)	F	Water, Food	25	2 Mpa	30373666**

AES OFFER INSTALLATION AND SERVICE SUPPORT FOR ALL EQUIPMENT

NEDERMAN 886 HOSE REEL STAINLESS STEEL

CONNECTION HOSES

Description	Hose Type	Use for	Hose Diameter (mm)	Max working Pressure	Model No.
Connection Hose (1m)	N	Water	19	10 Mpa	30377082
Connection Hose (1m)	N		25	0.6 Mpa	30377081

DISTRIBUTION HOSES

Description	Hose Type	Use for	Hose Diameter (mm)	Max working Pressure	Model No.
Distribution hose	G	Water High Pressure	10	25 Mpa	30371900*
Distribution hose	H	Water High Pressure	10	25 Mpa	30371953**
Distribution hose	I	Water	12.5	10 Mpa	30377078
Distribution hose	E	Water, Food	12.5	2 Mpa	30371898*
Distribution hose	E	Water, Food	19	2 Mpa	30371897*
Distribution hose	E	Water, Food	25	2 Mpa	30373663*
Distribution hose	F	Water, Food	12.5	2 Mpa	30371951**
Distribution hose	F	Water, Food	19	2 Mpa	30371950**
Distribution hose	F	Water, Food	25	2 Mpa	30373665**
Distribution hose	N		19	0.6 Mpa	30377080
Distribution hose	N		25	0.6 Mpa	30377079

*With galvanised steel fittings

**With stainless steel fittings

ACCESSORIES

Accessory	Part Codes
Pivoting Wall bracket Stainless Steel	30373668
Roller guide	30341550
Water gun in chromium plated brass	30400110
Water gun in stainless steel	30400210
Watergun EX	30400211
High temperature water gun	30400310
Air gun, standard	30410110
Swivelling coupling 3/8(m)-3/8(m)HP	30431310
Swivl. coupl. 1/2(m) - 3/8(f) brass	30431510
Swivl. coupl. 1/2(m) - 1/2(f) brass	30431610
Swivel coupling 1/2(m) - 3/4(f) bra	30431710
Swivl. coupl. 1/2(m) - 3/8(f) SS	30431810
Swivl. coupl. 1/2(m) - 1/2(f) SS	30431910
Swivl. coupl. 1/2(m) - 3/4(f) SS	30432010

AES OFFER INSTALLATION AND SERVICE SUPPORT FOR ALL EQUIPMENT