


## Nederman 950A EX - NE74, ATEX

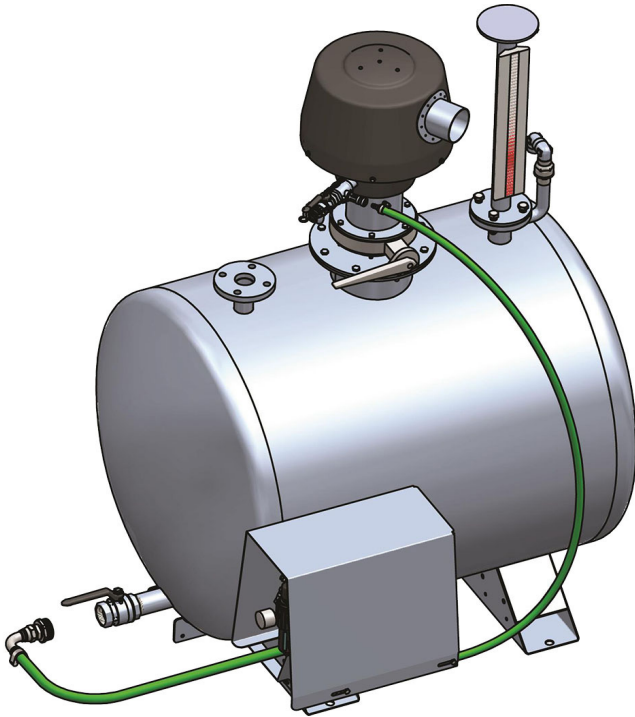

### TECHNICAL SPECIFICATION

|                                  |                          |
|----------------------------------|--------------------------|
| Application                      | Liquid                   |
| Certifications                   | CE, EX                   |
| Compressed Air Requirement       | 5,3 Nm <sup>3</sup> /min |
| Delivered with Hose              | No                       |
| Max. Airflow (m <sup>3</sup> /h) | 318                      |
| Max Vacuum (kPa)                 | -78                      |
| Noise Level (dB(A))              | 75.0                     |
| Type of Hose                     | N/A                      |
| Weight (kg)                      | 222                      |

### FEATURES

- High vacuum capacity giving high product lift
- 950 L (251 gal) storage capacity
- ATEX approved tank stripping unit
- Anti-static and conductive
- Suitable for suction of oil, water and other liquefied products

### PART CODE/ORDERING TABLE

|   |          |
|---|----------|
| Nederman 950A EX - NE74, ATEX Ex II 2 GD tan, tank 950L | 42295000 |
|---|----------|

### DESCRIPTION


This heavy duty stainless steel industrial vacuum unit is excellent for suction of hazardous and flammable liquids. Tank stripping vacuum system can transport material over long vertical and horizontal distances.

The tank cleaning unit is suitable for various cleaning and liquid pick-up operations in industry, and for stripping of cargo tanks and deep well sumps in shipping. Normally connected to tank stripping pumps equipped with stripping pipe. Parts in direct contact with collected liquids are made from stainless steel.



Liquid

### PERFORMANCE GRAPH

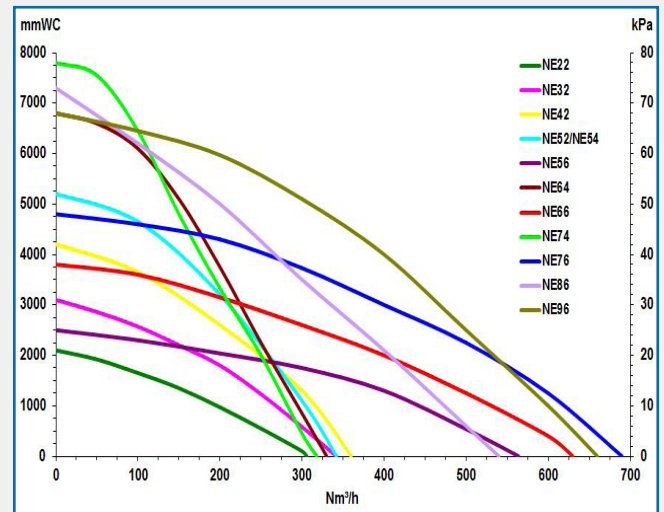

AES OFFER INSTALLATION AND SERVICE SUPPORT FOR ALL EQUIPMENT