

## MEDDINGS LB2 MK 4 BENCH DRILL



### TECHNICAL SPECIFICATION

Drilling capacity in Mild Steel	23 mm
Motor	0.45kW/0.75kW (2 speed)
Spindle	2 MT
Drive	Belt, stepped pulleys
Spindle speed rpm 50Hz	200-350-400-600-700-1050-1200-1800-2100-3600
Spindle travel	75 mm
Throat depth	185 mm
Column diameter	70 mm
Table—working surface	250 x 164 mm
Table—slots width & centres	13 x 125 mm
Dimensions	
Base	240 x 360 mm
Max. distance chuck to table	330 mm
Overall height	865 mm
Overall width	280 mm
Overall depth	600 mm
Approx weight	84 kg

### DESCRIPTION

The LB2/III Bench Drill is constructed with a powered motor driving a five step dynamically balanced pulley set giving five speeds to the spindle. The motor is mounted on a hinged motor plate which is sprung loaded to enable fast, easy speed changes and which automatically ensures the correct belt tension.

The LB2 can be fitted with an optional kick stop switch which can be wired into the no-volt/ overload release starter. This specific safety requirement makes it an ideal choice for training environments in schools and technical colleges.

### FEATURES

- Front mounted NVR switch
- Built-in integral work light
- Micro switched pulley cover
- Rack and pinion table raising mechanism
- Telescopic chuck guard
- Meets all current safety standards


### AES PART CODE/ORDERING TABLE

Meddings LB2/III Bench Drill (3PH)	WE-DR07-003
------------------------------------	-------------

### STANDARD EQUIPMENT

- Rack and pinion adjustment
- Worklight and base mounted stop switch
- Chuck guard

### SAFE WORKING AREA

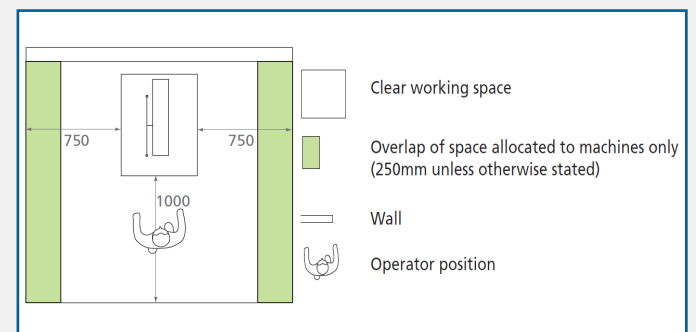

AES OFFER INSTALLATION AND SERVICE SUPPORT FOR ALL EQUIPMENT